

AdBlue® / DEF Manual Nozzle



361 00X.370

DESCRIPTION

Plastic manual nozzle designed for delivering aggressive chemical fluids. It is light, robust and includes a trigger latching mechanism.

SUITABLE FOR THE FOLLOWING FLUIDS

Aus 32 (AdBlue® / DEF), Water, Diesel, Oil, Lubricants.

AVAILABLE PRODUCTS

Below codes refer to above nozzle with corresponding factory fitting assembled:


Part No. 361 001.370
Ø 3/4" Hose barb swivel



Part No. 361 002.370
Ø 1" hose barb swivel



Part No. 361 003.370
1" G BSP Female swivel

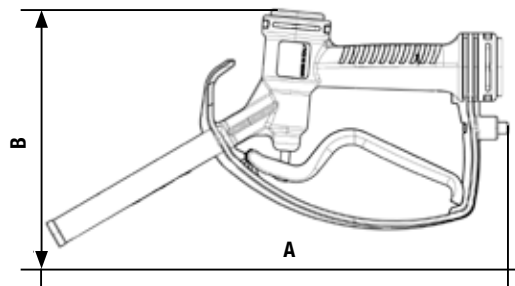

A	B
310 mm (12.2")	163 mm (6.4")

TECHNICAL SPECIFICATIONS

FLOW RATE @ 2 BAR PRESSURE DROP	90 l/min (23,8 gal/min)
MAX. PRESSURE	5 bar (72.5 psi)
MAX. TEMPERATURE	60 °C (120 °F)
TRIGGER OPENING FORCE	< 70 N (< 16 lbf)
WEIGHT (APPROX)	270 g (0.6 pounds)
WETTED PARTS	Glass fibre reinforced PA6, Glass fibre reinforced PP, Stainless steel, Viton®