AdBlue® / DEF Automatic Nozzle For Light Vehicles

FLO MASTER®

AdBlue® Urea

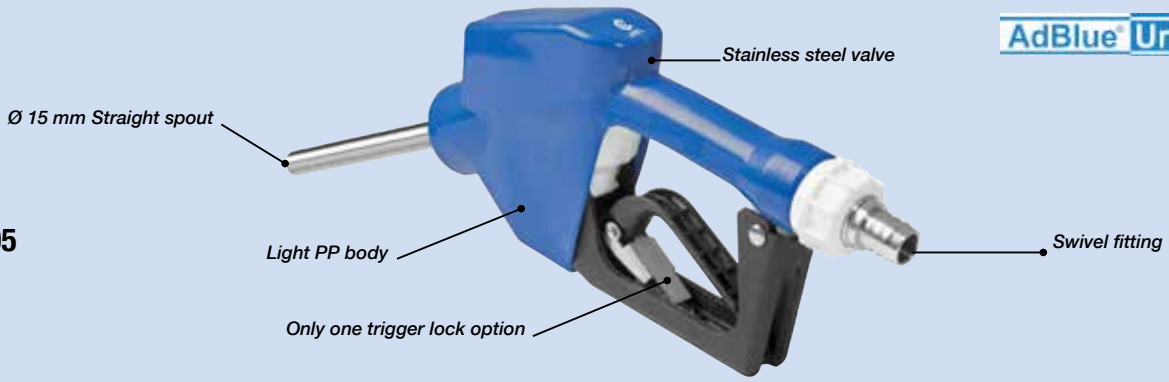

569 005

DESCRIPTION

PP and SS automatic nozzle designed specifically for dispensing AdBlue® / DEF into small vehicles. Includes a thinner straight spout and features a restrained valve to allow a flow rate of 10 l/min in its only trigger lock option.

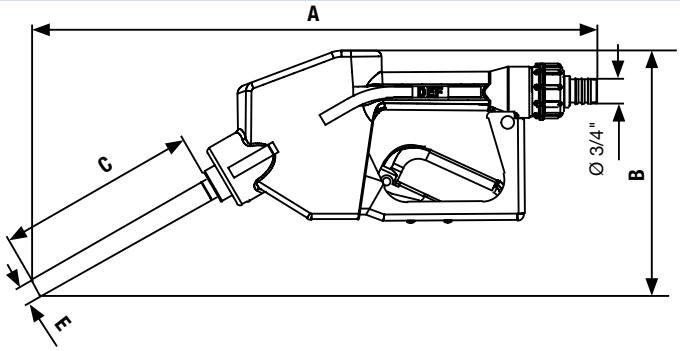

A	B	C	E
438,5 mm (17.2")	191 mm (7.5")	157 mm (6.12")	Ø 15 mm (0.6")
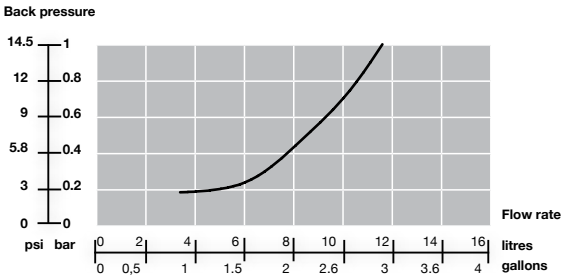
TECHNICAL SPECIFICATIONS	
PART No.	569 005
MAX. FLOW RATE	15 l/min (4 gal/min)
MAX. WORKING PRESSURE	3 bar (43.5 psi)
MINIMUM FLOW RATE REQUIRED FOR AUTOMATIC SHUT-OFF	7 l/min (2.6 gal/min)
WETTED PARTS	Stainless steel, PP, Viton®
ACCESSORIES	
945 731	Polypropylene and stainless steel swivel fitting 1" BSP F - 3/4" hose barb
945 768	Stainless steel swivel 1" BSP (F) - 3/4" hose barb