

# Diesel Automatic Nozzle 60 l/min


FLO MASTER®

**688 300**



## DESCRIPTION

Aluminium automatic nozzle designed for delivering diesel. It is light, robust and includes a trigger latching mechanism to ease fluid delivery at different flow rates and an aluminium swivel to 1" BSP F to allow an easy hose connection.

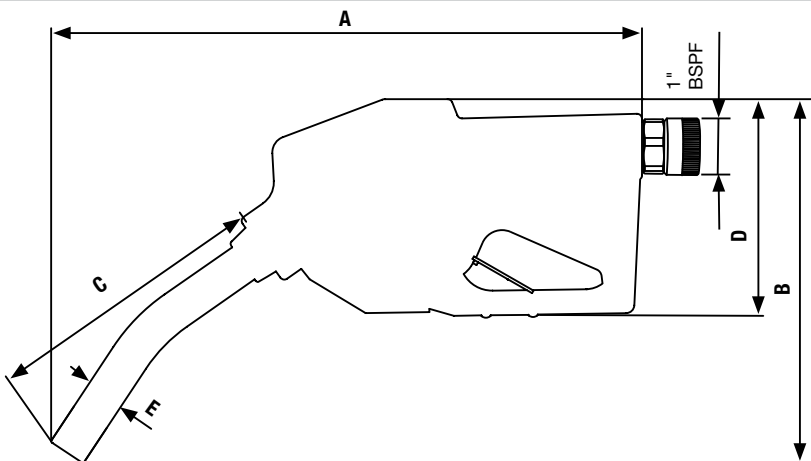

A	B	C	D	E
360 mm (14.2")	222,5 mm (8.8")	175 mm (6.9")	132 mm (5.2")	Ø24 mm (0.9")

TECHNICAL SPECIFICATIONS	
PART No.	688 300
MAX. FLOW RATE	70 l/min (18 gal/min)
MAX. WORKING PRESSURE	3 bar (43.5 psi)
WEIGHT (APPROX)	1,2 kg (2.6 pounds)
MINIMUM FLOW RATE REQUIRED FOR AUTOMATIC SHUT-OFF	12 l/min (3 gal/min)
WETTED PARTS	Aluminium, stainless steel, Viton®, NBR
SPARE PARTS / ACCESSORIES	

688 902



Aluminium swivel fitting 3/4" BSP M-1" BSP F

