


Plastic Lever Pumps

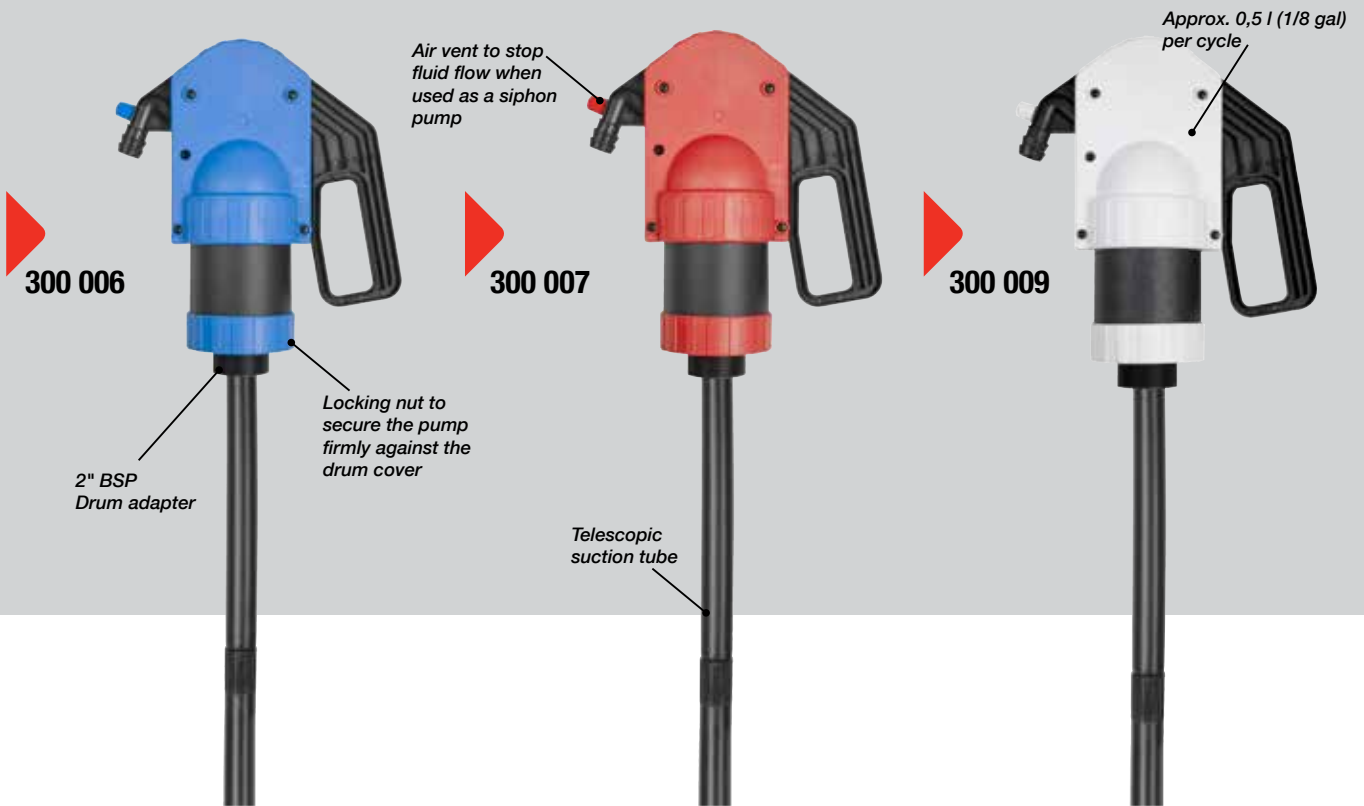

DESCRIPTION

Lever action pumps with a unique toggle mechanism that provides a very smooth operation.

Pumps are manufactured in polypropylene and include a 2" bung adaptor with a lockable nut that allows placing the pump in its optimal position for an easier lever action.

TECHNICAL SPECIFICATIONS			
TEMPERATURE RANGE	-5 °C + 45 °C (23 °F + 113 °F)		
WEIGHT	± 980 g (2.2 pounds)		
PUMP DELIVERY PER STROKE	500 cc (1/8 gallon)		
TUBE LENGTH	350 - 980 mm (1 - 3.3 feet)		
FOR MEDIUM AND LOW VISCOSITY FLUIDS			
PART No.	300 006	300 007	300 009
FLUID COMPATIBILITY	Water, windshield wash, antifreeze, detergent, agriculture chemical fluids, DEF, AdBlue® / DEF, etc.	Water, windshield wash, antifreeze, detergent, agriculture chemical fluids, DEF, AdBlue® / DEF, etc.	Oil, Diesel, Kerosene and other petrol derivatives.
WETTED MATERIALS	Polypropylene, EPDM.	Polypropylene, Viton®	Polypropylene, NBR
ACCESSORIES / SPARE PARTS			
300 900	Plastic delivery hose		
940 697	2" to trisure plastic adaptor		

